

MS 27 INSTRUCTIONS



oliser

Mesrutiyet caddesi. Hatay Sokak. 17/B

06640. Kızılay / Ankara

Turkey

Tel : +90 312 417 72 75

Fax : +90 312 425 72 81

Web : www.oliser.com.tr

Email : oliser@oliser.com.tr



preparation

Place an Ink supply bottle to the back of the machine and insert the ink supply tube into the bottle. Insert the compressed air output (must be adjusted max. 8 Bars/90PSI) via Air In connector 4mm diameter size.

Plug in the plug and the machine will be ready to start filling .

Now, The machine is ready to fill the cartridges. Before filling the cartridges, be sure that they are empty. If not, evacuate the remaining ink from cartridge.

Strictly recommended : Before filling the cartridges we recommend you to clean the printheads of the cartridges by a steam generator. It will help you to fill the cartridges easily and will open the all clogged or dried printheads, So, your success rate will increase

To Order Call: [+90 312 417 72 75](tel:+903124177275)





Take out the top label of cartridge and place the color cartridge in to the evacuation/filling station .



Push the needles down .



Be sure that needles placed correctly.



Flip down the switch to start evacuation to empty the cartridge first, it will be empty in 20-30 seconds.

To Order Call: [+90 312 417 72 75](tel:+903124177275)





Each Time pushing to the MODE button, Cyan / Magenta / Yellow and UNI will appear on the display and related ink volumes.

You can manually adjust the ink volumes of each color pushing -1 and +5 buttons. Adjust the Ink volumes for each color 7ml and push START button to fill the cartridge.



After filling has completed flip down the Evacuation station 2-3 seconds for priming the cartridge, Bring the top position the needles and take out the cartridge from station and test it.



Take out the top label of cartridge and place the black cartridge in to the evacuation/filling station .



Flip down the switch to start evacuation to empty the cartridge first, it will be empty in 20-30 seconds.

To Order Call: **+90 312 417 72 75**





Adjust the ink volume 20ml for black cartridges at UNI side.



After filling has completed flip down the Evacuation station 2-3 seconds for priming the cartridge, Bring the top position the needles and take out the cartridge from station and test it.

Each Time pushing to the MODE button, Cyan / Magenta / Yellow and UNI (BLACK) will appear on the display and related ink volumes.


You can manually adjust the ink volumes of each color pushing -1 and +5 buttons.

With Oliser's controllers, you can manually choose how ml of ink you want to fill for each color. And also on which station (Universal or C / M /Y) you want to work. Filling and Evacuation can be done on both side at the same time.

To Order Call: **+90 312 417 72 75**



Tube replacement of motors

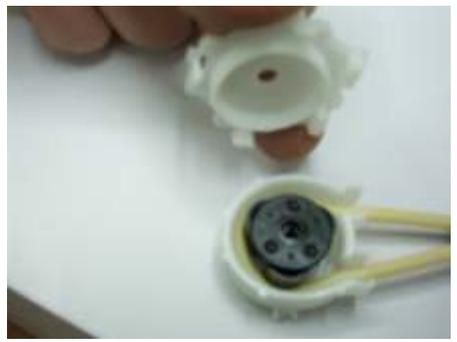

To Order Call: +90 312 417 72 75